


HYDROGENE


Technical specifications available on request

Principle of connection

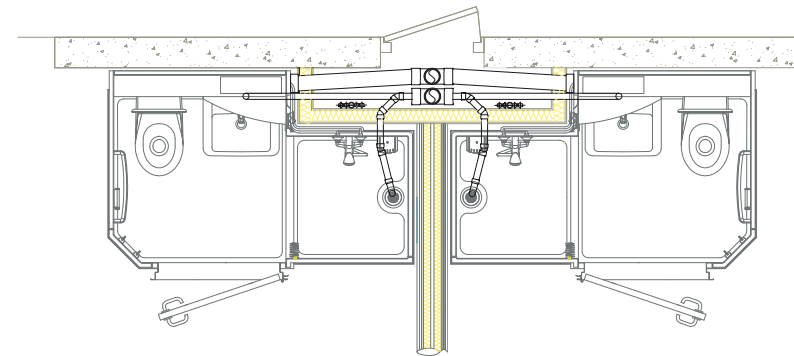

Principle of connection, here represented on Tradiline model, based on a single vertical outlet.

Cost and time optimization with ALTOR

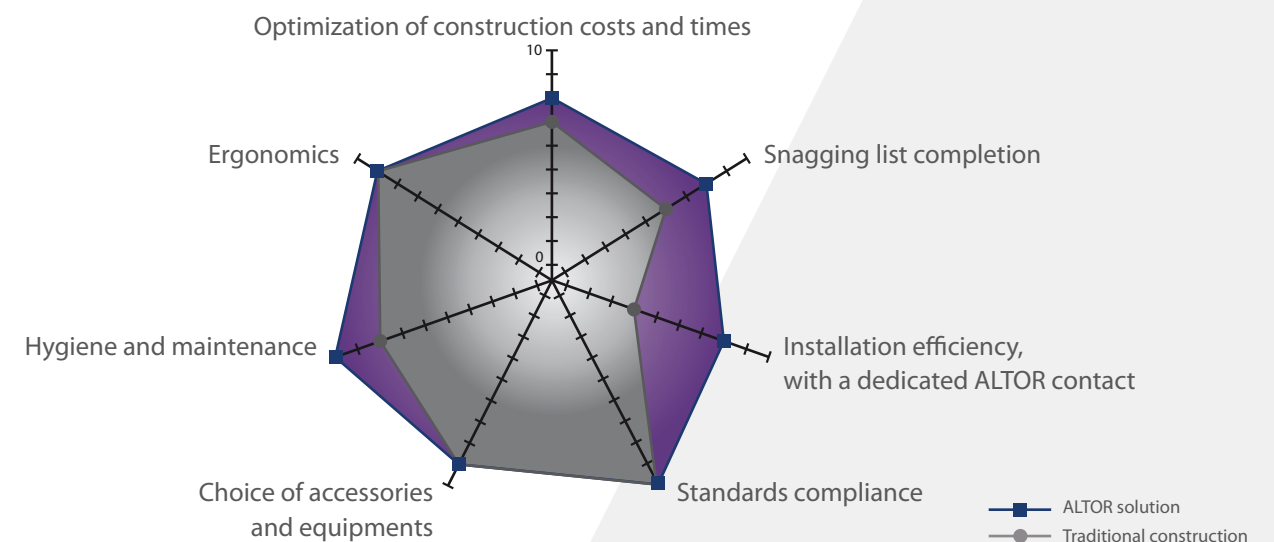

Complete support on all of your projects



Supporting our sales representative, a technical contact will help you to adjust your bathroom on your plans and define your plumbing interfaces and casings.

Technical support may be provided, for monitoring.

A customer service team is available to answer any questions regarding the product warranties and to handle any malfunctions that may arise.



Head office: Parc industriel de Tabari - BP 9417 - 44194 Clisson CEDEX - France

Tel. +33 (0) 2 40 36 16 67 - Fax +33 (0) 2 40 36 16 78

altor@altor-industrie.com - www.altor-industrie.com

UK subsidiary: Portland House, Bressenden Place - London SW1E 5RS - UK

Mobile. 0753 9221 852 - D1 0208 4336 921

Jean-Francois.Marty@altor-industrie.co.uk - www.altor-industrie.com



Recommended for :



Housing

- Optimal size
- Modern esthetics and design
- Incorporation of all regulatory constraints
- Easy to install and maintain



/// Prefabricated bathroom

The fully equipped bathroom can be installed and connected in less than six hours. Because it is free-standing, the bathroom is not subject to the building's construction constraints. It is designed to make each function (shower space, toilet and wash basin) to be as user-friendly and functional as possible, while offer all of the available maintenance and upkeep features.

/// Regulation compliance

ALTOR's bathrooms conform to applicable regulations and certifications.

/// Structure

- The walls, floor and ceiling are fiberglass reinforced polyester, assembled with screws and bolts, with watertight joints made of closed-cell foam.
- Embossed non slip floor with step entrance <200 mm, and horizontal shower outlet.
- Surface finish : interior sanitary quality gelcoat with smooth finish and pattern, shower area, rough outside ready to be clad.

/// Fully equipped

- Wash basin, shower and wash basin mixers, mirror, shower bar and shower head, shower rail and curtain, hooks, and toilet paper holder.
- Aluzinc® white lacquered door frame (600 mm door width) + stainless steel threshold.
- Locking system.
- Stainless steel door handle.
- Fixed large mirror.
- Spots light 12V, standard 50 W dichroic.
- Air extraction self-adjusting valve.
- Water supply pipe insulated thickness 13 mm, with none-return valves and filters.

/// Easy to install

- Rough outer surface, ready for a plaster board covering (not included in the ALTOR's service).
- Design for either new constructions, or renovation projects.
- Project study monitoring, by ALTOR team (see terms and conditions).
- Access panel to connect water and electricity supply.

/// Maintenance and upkeep

Easy to maintain due to an access trap to usual service shaft for plumbing, outlet and electricity connexions.

/// Weight

Approximately 165 kg.

/// Options


Main options listed in the table below.

OTHER OPTIONAL ACCESSORIES

- Time flow or thermostatic wash basin mixer
- Time flow or thermostatic shower mixer
- Overlap laminated door
- LED spotlights
- Other accessories on study

/// Color chart examples

ALTOR's polyester color chart



Réf. 6421 Réf. 4235 Réf. 3118 Réf. 3205 Réf. 4329 Réf. 5098

Regulatory responses and certifications

Design compliant with standards for accessibility for persons with disabilities, as per French Law 2005-102



NF-compliant equipment



Electric design compliant with standard NF C 15-100, confirmed by inspection agencies



Designed as per ISO 9001 certification



Compliant with the rules of BREEAM UK




Compliant with the rules of WRAS



Compliant with the British Standard




/// Elevation

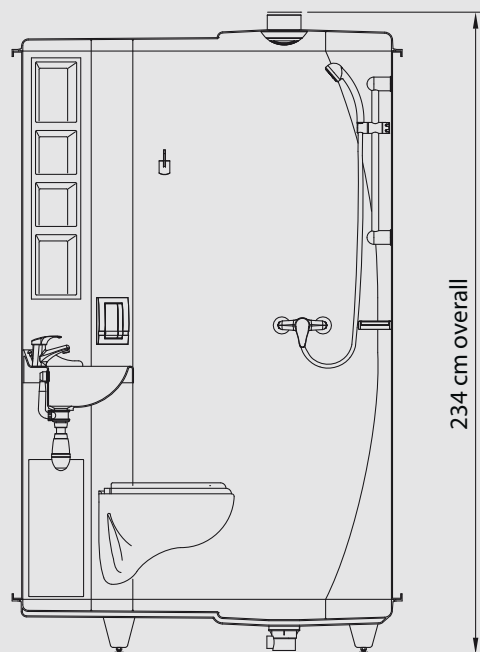

HYDROGENE
(see our technical plans for details)

/// Footprint

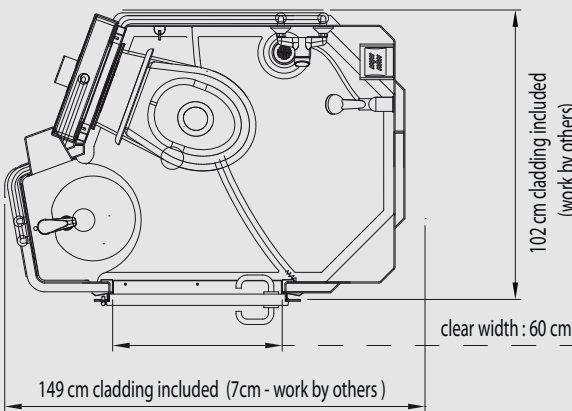

HYDROGENE version



Bird's-eye view of the HYDROGENE model

/// Handling

