


# LODGE<sup>UK</sup>


Technical specifications available on request

## Principle of connection

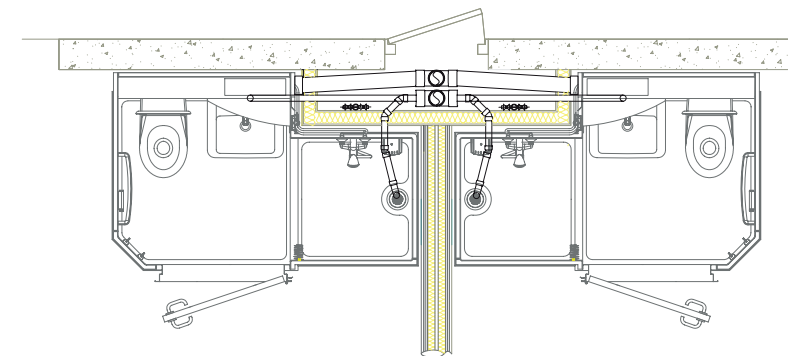

Principle of connection, here represented on Tradiline model, based on a single vertical outlet.

## Cost and time optimization with ALTOR

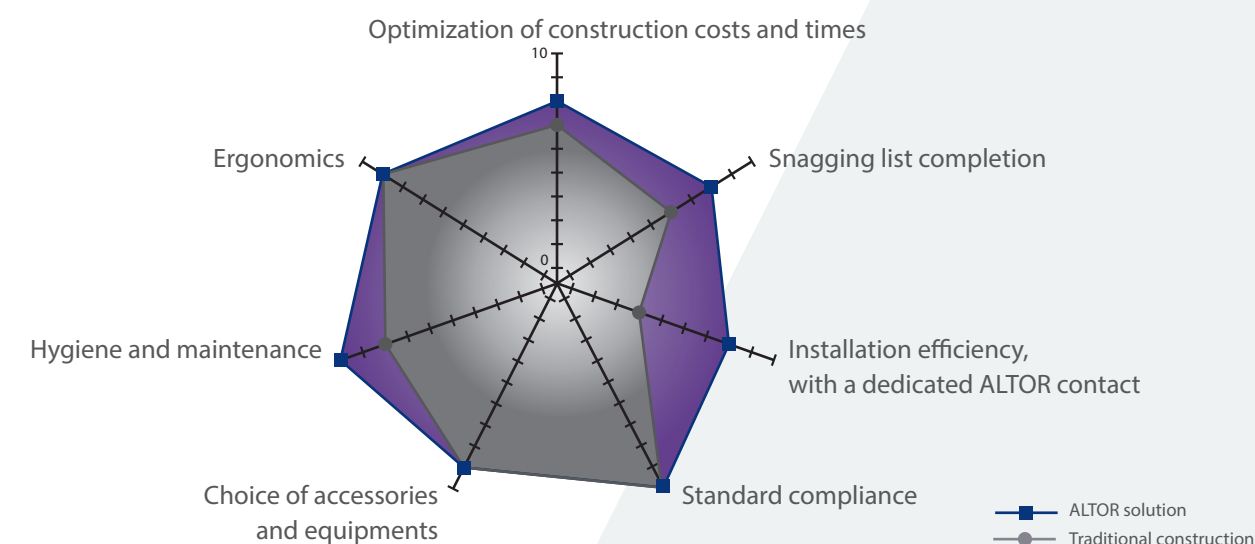

## Complete support on all of your projects



Supporting our sales representative, a technical contact will help you to adjust your bathroom on your plans and define your plumbing interfaces and casings.

Technical support may be provided, for monitoring.

A customer service team is available to answer any questions regarding the product warranties and to handle any malfunctions that may arise.



Head office: Parc industriel de Tabari - BP 79417 - 44194 Clisson CEDEX - France  
Tél. +33 (0) 2 40 36 16 67 - Fax +33 (0) 2 40 36 16 78  
altor@altor-industrie.com - [www.altor-industrie.co.uk](http://www.altor-industrie.co.uk)  
UK office : Lincoln House, 4th floor, 300 High Holborn - London WC1V 7JH - United Kingdom



Recommended for :



Student accommodation



Hospitality

Model displayed with options

Version 18



## Description and color chart

### /// Prefabricated bathroom

**The fully equipped bathroom can be installed and connected in less than six hours. Because it is free-standing, the bathroom is not subject to the building's construction constraints. It is designed to make each function (shower space, toilet and wash basin) to be as user-friendly and functional as possible, while offering all of the available maintenance and upkeep features.**

#### /// Regulation compliance

ALTOR's bathrooms conform to applicable regulations and certifications.

#### /// Structure

- The walls and floor are fiberglass reinforced polyester, assembled with screws and bolts, with watertight joints made of closed-cell foam.
- Self-supporting floor with 20 mm entrance. Embossed non-slip floor.
- Surface finish: interior sanitary quality gelcoat entrance, WC and wash basin in GRP tile effect, rough outside ready to be clad.
- Isopan FB1 ceiling with white PVC, facings 19 mm

#### /// Fully equipped

- Wash basin and wash basin mixers, mirror, shower bar and shower head, shower rail and curtain, hooks, and toilet paper holder.
- Aluzinc® white lacquered door frame (800 mm door width) + stainless steel threshold.
- Locking system.
- Stainless steel door handle.
- Fixed large mirror.
- Shelf.
- LED spotlights.
- Air extraction self adjusting valve.
- Water supply pipe insulated thickness 13 mm, with none return valves and filters.
- Shower screen.

#### /// Easy to install

- Rough outer surface, ready for a plaster board covering (not included in the ALTOR's service).
- Design for either new constructions, or renovation projects.
- Project study monitoring by Altor team ( see terms and conditions).
- Access panel to connect water and electricity supply.

#### /// Maintenance and upkeep

- Easy to maintain due to an access trap to usual service shaft for plumbing, outlet and electricity connexions.

#### /// Weight

Approximately 200 Kg.

#### /// Options


Main options listed in the table below.

#### OTHER OPTIONAL ACCESSORIES :

- Time flow or thermostatic wash basin or shower mixer
- Shelf in compact sandwich wenge or alder
- Overlap laminated door
- Shaving point
- Closing cabinet above washbasin
- Wall in color
- Resilient floor
- Electric or hot water towel breater

## Drawings

### /// Elevation

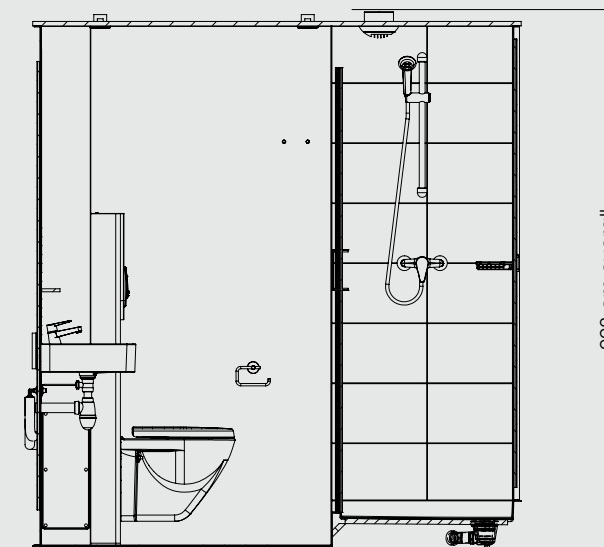


Over all height  
(see our technical plans for details)




Tile effect in the shower area

### /// Footprint

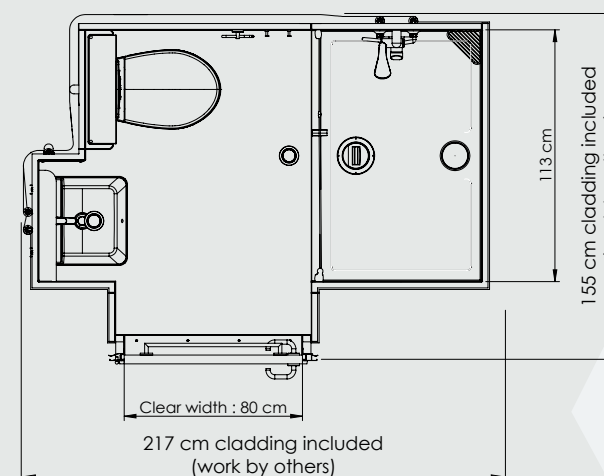



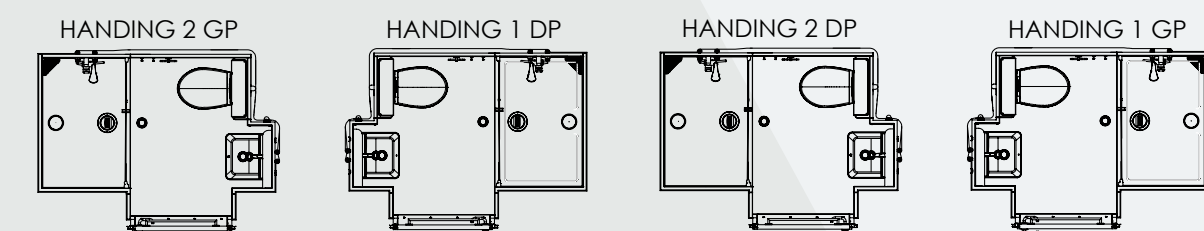






Bird's eye view of the LODGE model

### /// Handings



### /// Colour charts examples

ALTOR's polyester color chart

				
Réf. 5388	Réf. 5387	Réf. 6967	Réf. 4573	Réf. 7145
				
Réf. 2659	Réf. 3118	Réf. 3205	Réf. 4329	Réf. 5098

## Regulatory responses and certifications

Indoor air  
quality



Designed as per  
ISO 9001  
certification



Compliant  
with the rules of  
BREEAM UK



Compliant  
with the rules of  
WRAS



Compliant  
with the British  
Standard

